

sample>

2024 COMPANY PROFILE

LED Display Solution Provider, Established in 2006



CONTENTS

- 01 ABOUT
- 02 MANUFACTURING CENTER
- 03 QUALIFICATIONS
- 04 MAIN PRODUCTS
- 05 PROJECT CASES

01 ABOUT US

sampleX

ABOUT US

Samplex, head-quarter in Guangzhou Science City, has been a leader in LED display solutions for decades. Our products are sold in 30+ countries and are well known for our quality and reliability. Our production line is equipped with advanced facilities. We now have more than 300 employees and we excels in R&D, production, and supporting services. We prioritize innovation and global partnerships for shared success.



Headquarter Office:

27/F, Tower E, No. 48, Kexue Blvd,
Huangpu District, Guangzhou, China



Factory Add:

No.64-13, Wushi 2nd Road, Zhongxin
Subdistrict, Zengcheng District, GZ



2006

Established

18

Years

17

(M.USD)
Regst capital

40K+

Project Cases

300+

Employees

8K+

sqm / Factory
<Self-purchased>

10K+

Multiple 10+
Years Technician

N


Patents & IP
<Intellectual Property>

14

(M. USD)
Sales Amount

2K+

sqm / Office
<Self-purchased>

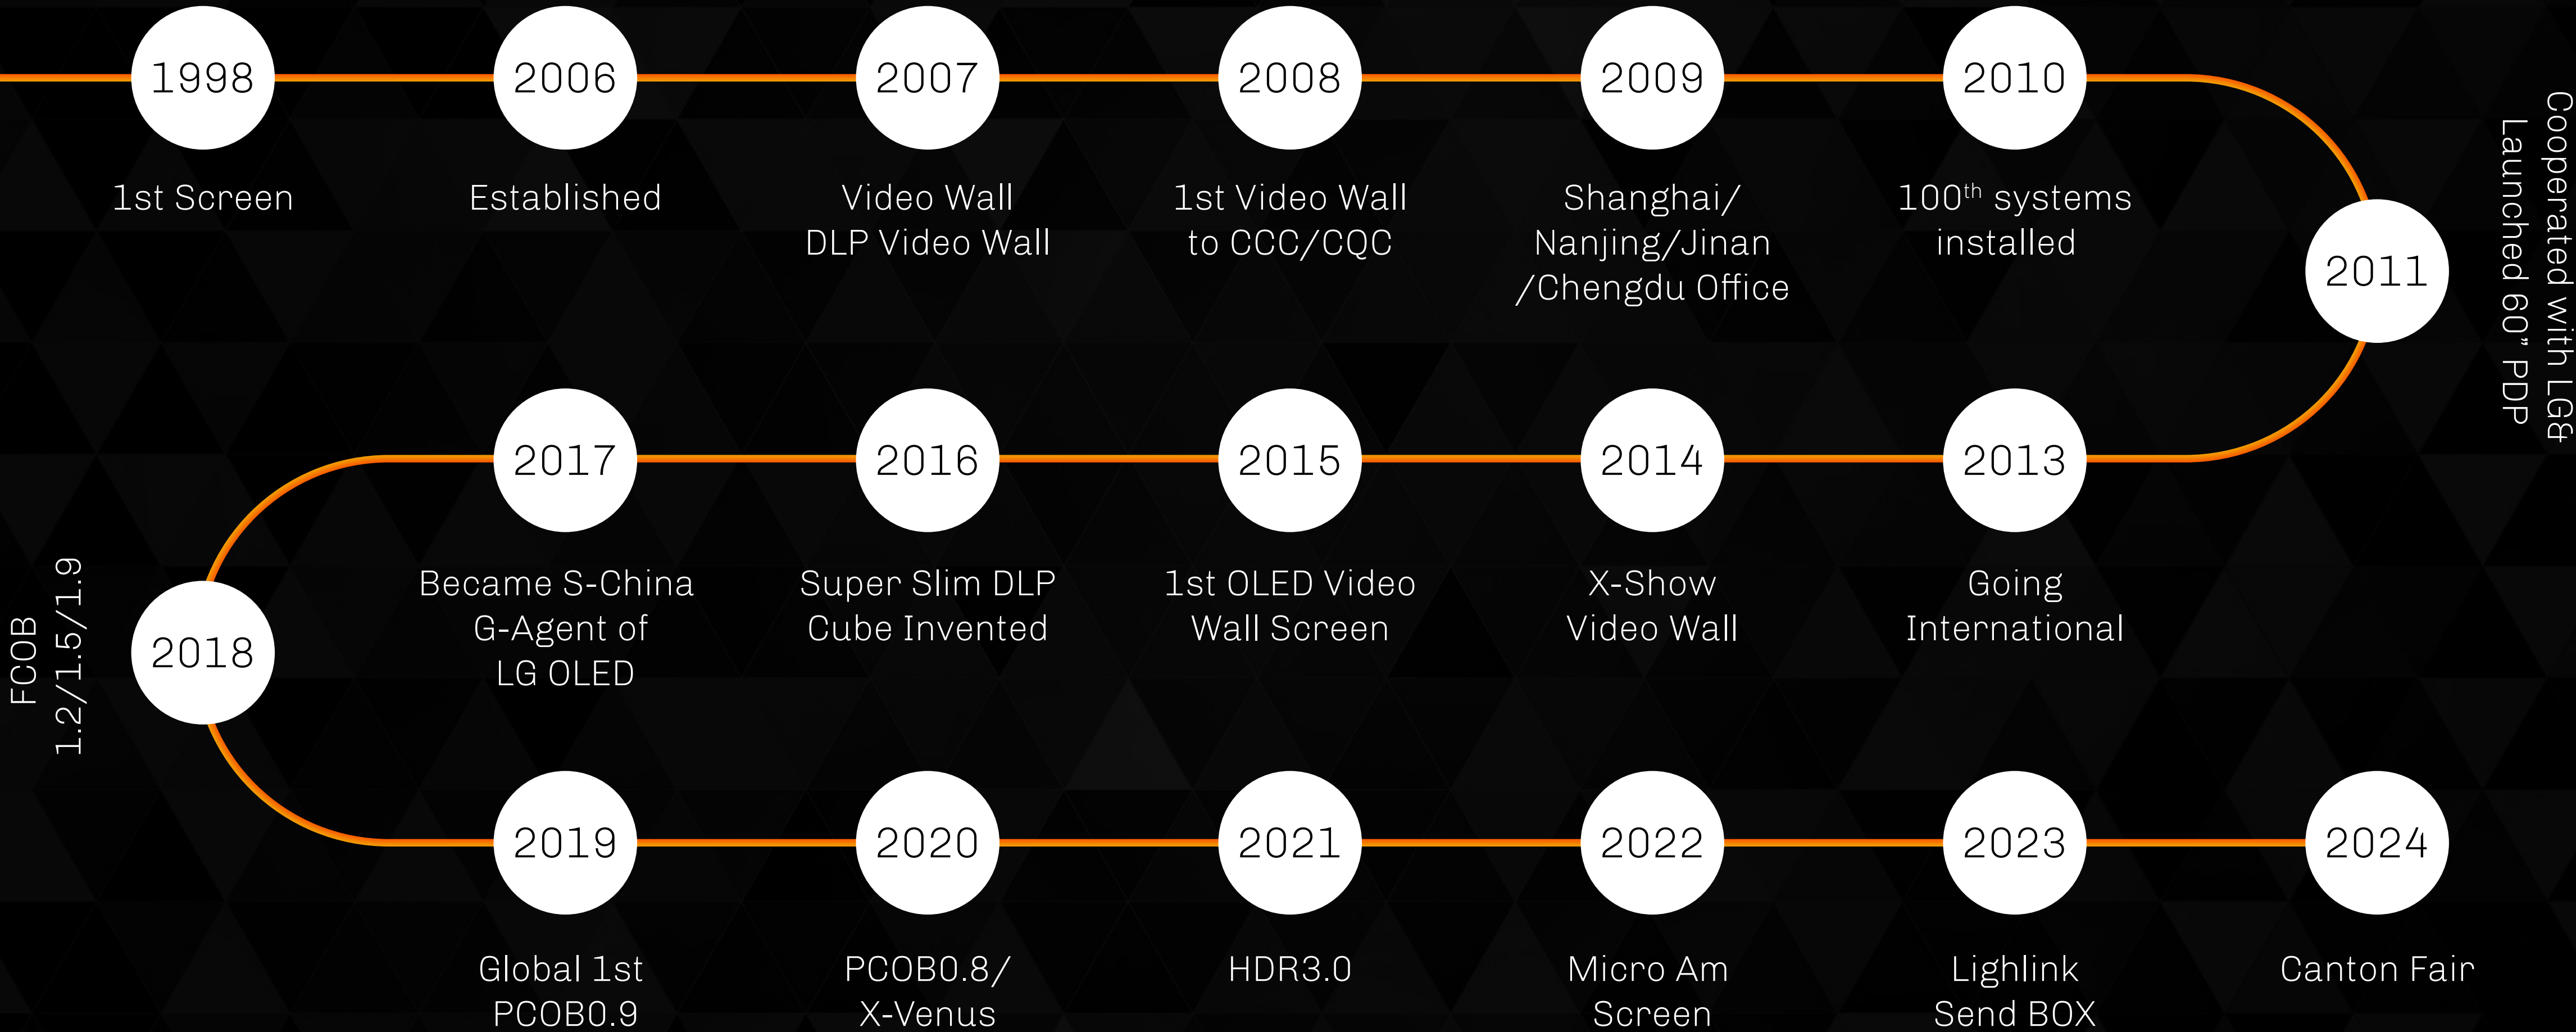

Headquarter Office

📍 Guangzhou, China

sample^x



Showroom

sampleX



02

MANUFACTURING CENTER

sampleX

Factory



Factory

Aging Workshop



Factory


SMD LED Production Line

samplex



Factory

Certification - ISO

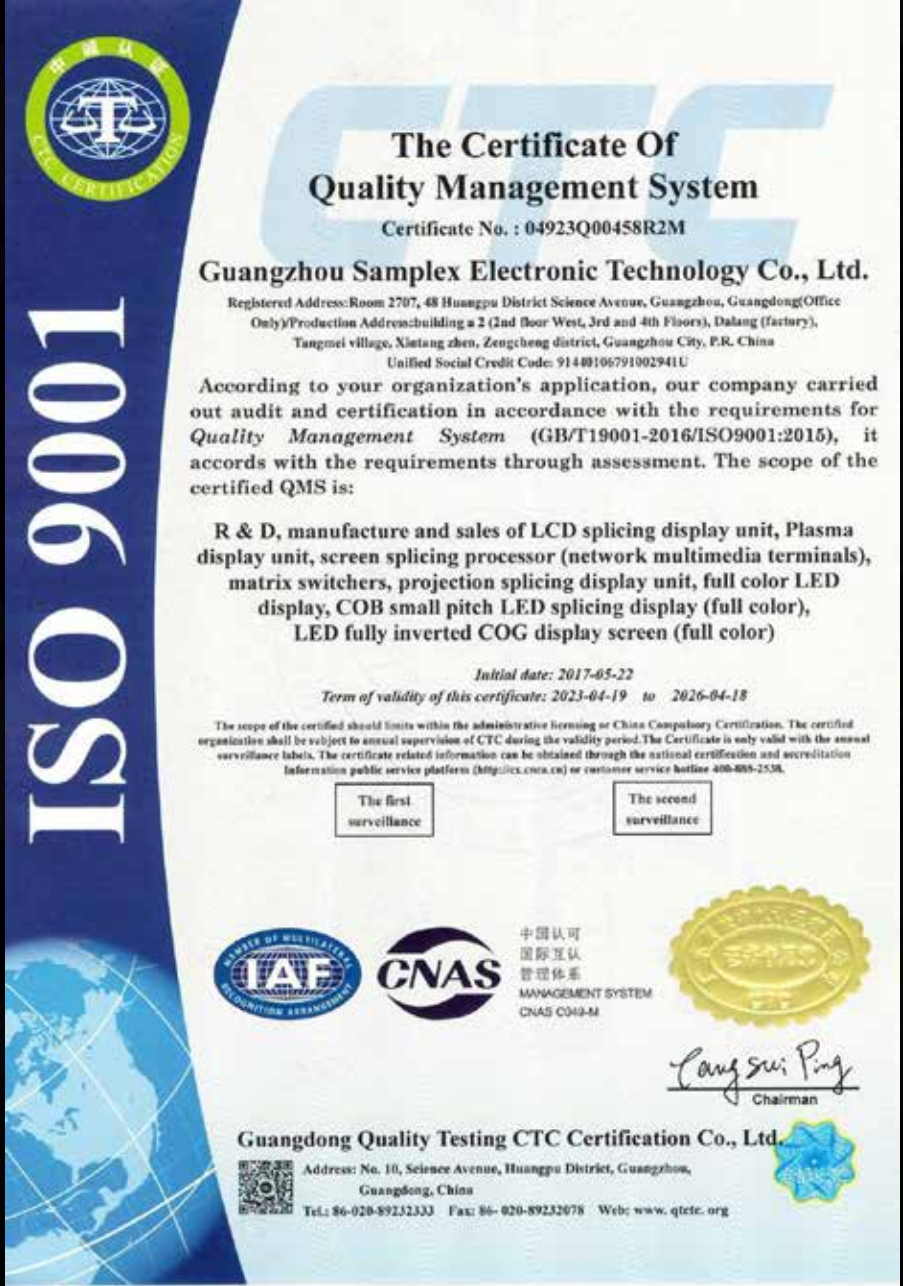

ISO 9001
Quality



ISO 14001
Environmental



ISO 45001
Health & Safty

03 MAIN PRODUCTS

sampleX

MAIN PRODUCTS

sample^x



Rental




Outdoor



Indoor

MAIN PRODUCTS

sample^x

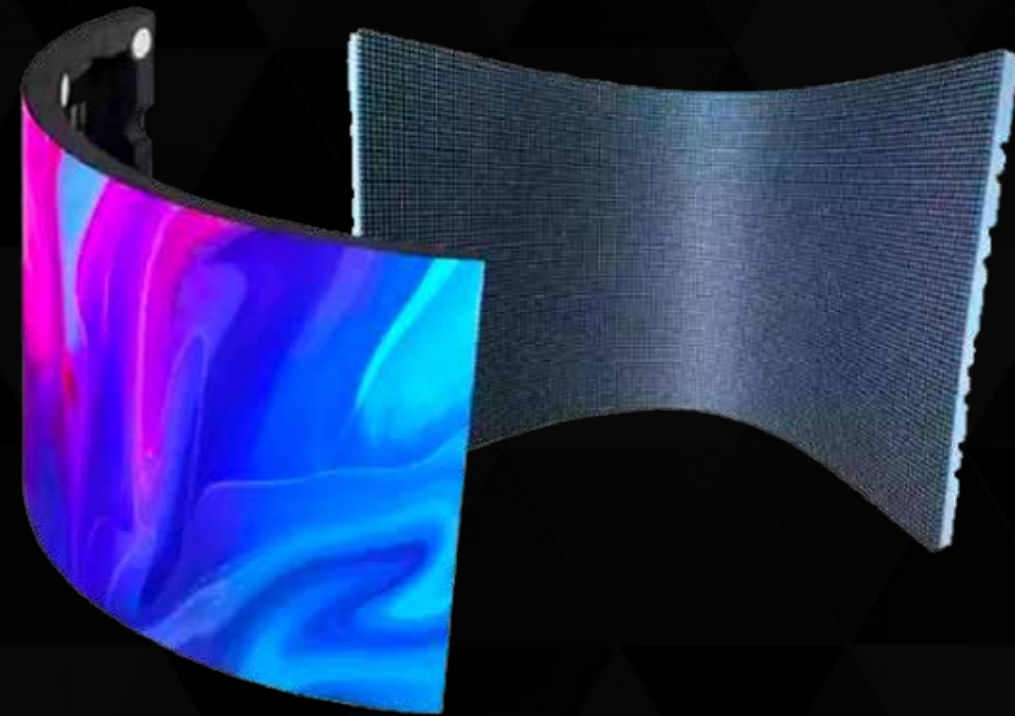

Flexible



Transparent



COB

MAIN PRODUCTS

Rental Outdoor/Indoor - 500*500 / 500*1000



Items	Parameters
Cabinet Size (mm)	500*500 500*1000
Brightness (cd/m ²)	4500
Refresh Rate(Hz)	3840
Average Power (W/m ²)	≤450
Ingress Protection IP65	IP65

MAIN PRODUCTS

Rental Outdoor/Indoor - Application Scenarios

Music Concert



Music Show



Event



Sports Ad



MAIN PRODUCTS

Outdoor - 960*960



Items	Parameters
Cabinet Size (mm)	960*960
Brightness (cd/m ²)	5000
Refresh Rate(Hz)	3840
Average Power (W/m ²)	≤450
Ingress Protection IP65	IP65

MAIN PRODUCTS

Outdoor - 960*960 - Application Scenarios

Theme Park




Shopping Mall



Office Outside



Building Outside

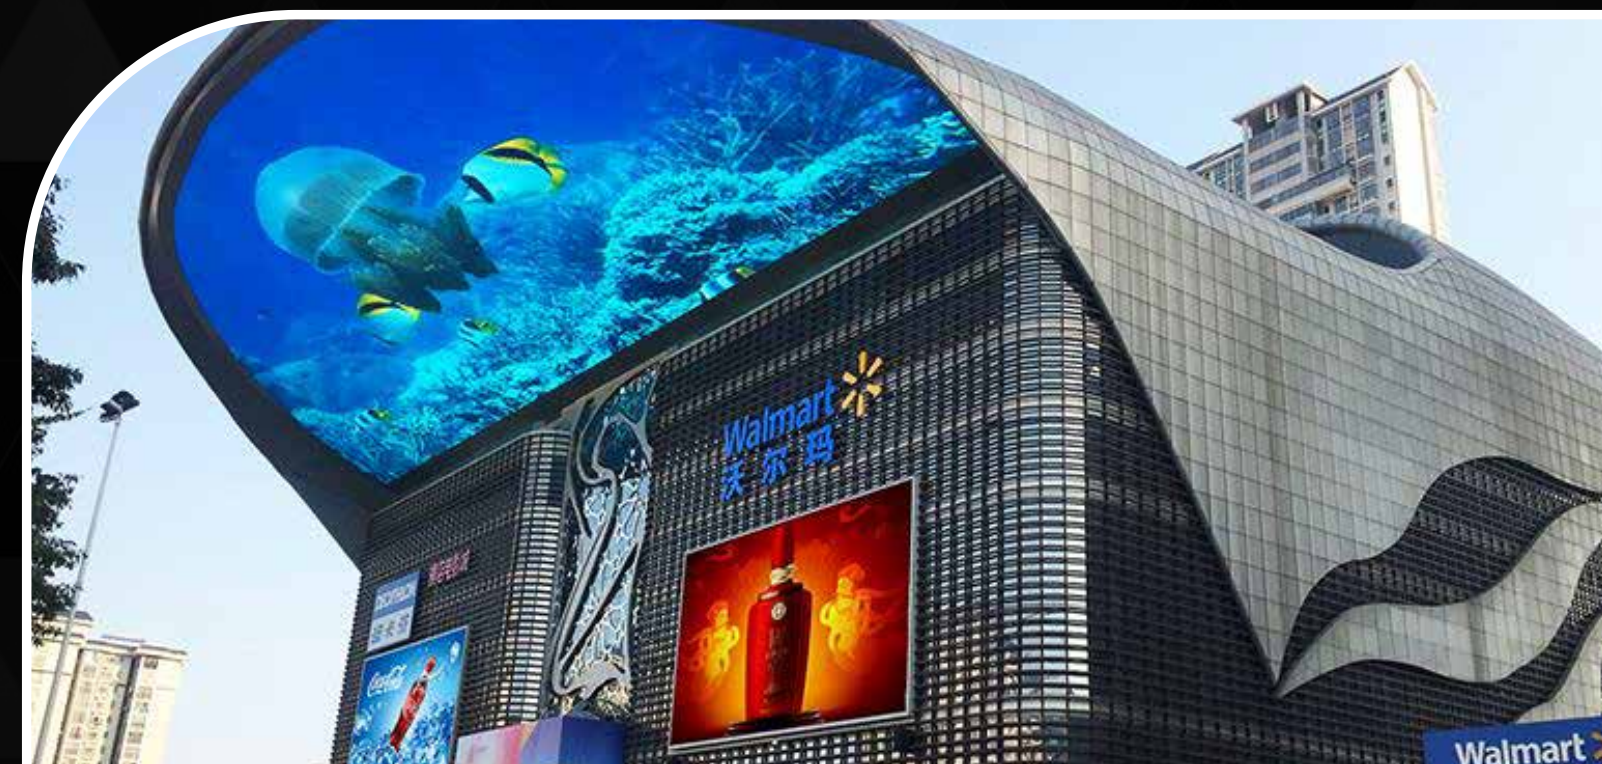

MAIN PRODUCTS

Indoor



Items	Parameters
Cabinet Size (mm)	640*480/600*337.5
Brightness (cd/m ²)	600
Refresh Rate(Hz)	3840
Average Power (W/m ²)	≤350
Ingress Protection	IP20

MAIN PRODUCTS

Indoor - Application Scenarios

Command Center



Studio Hall



Airport




Conference Room



MAIN PRODUCTS

3D Motion Screen (Indoor)

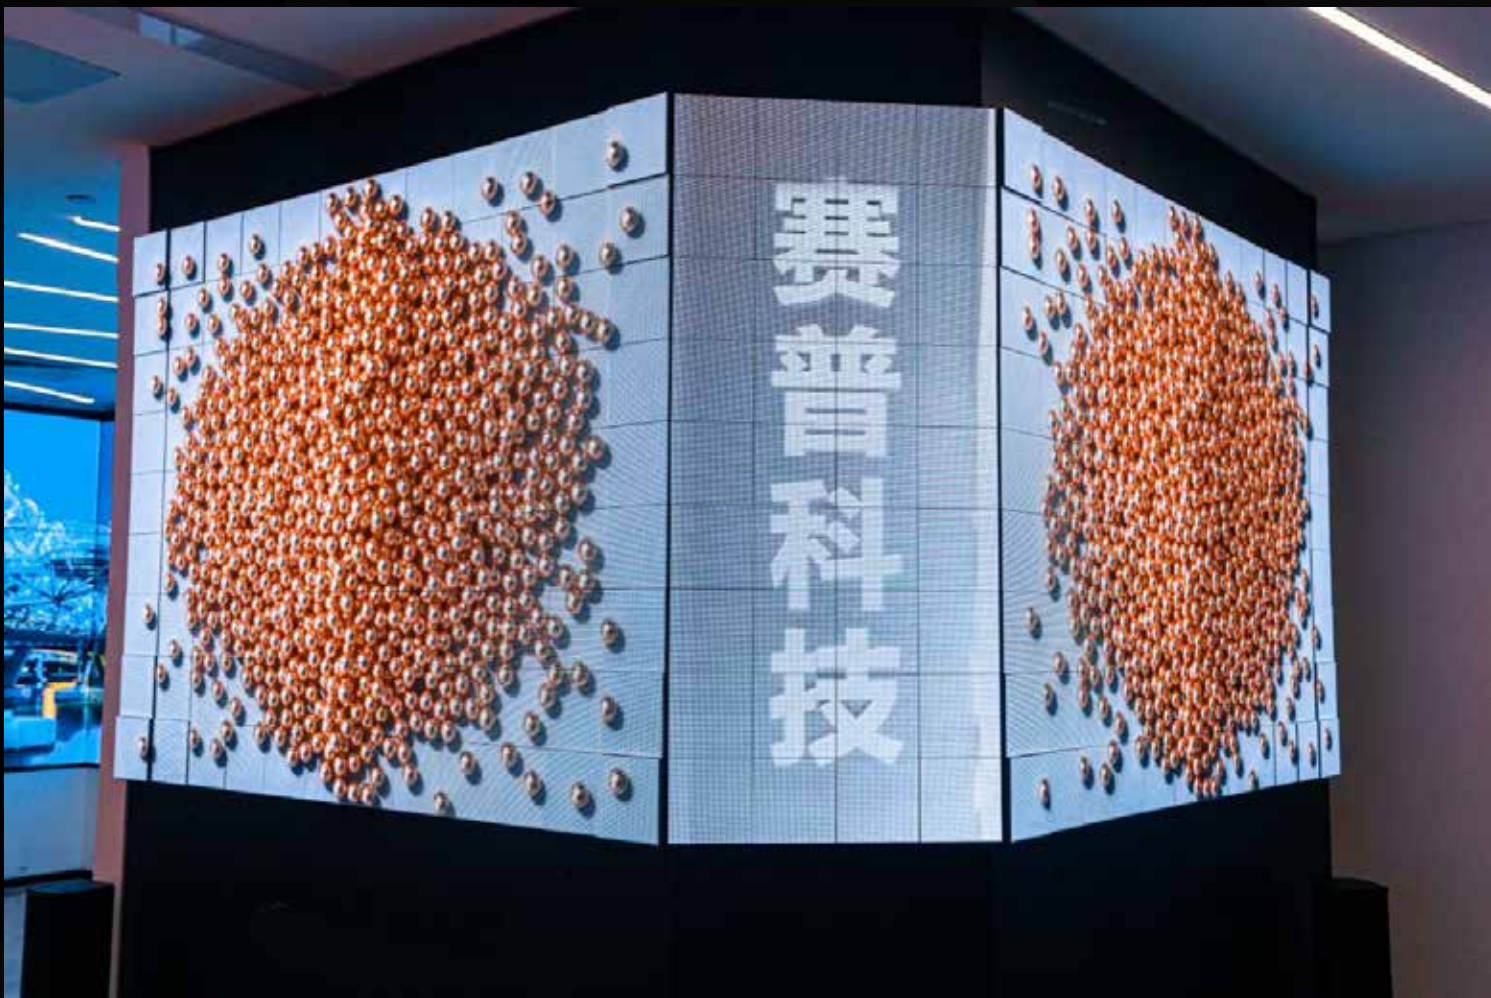


Items	Parameters
Pixel Pitch(mm)	P1.78 / P1.98 / P2
Cabinet Size(mm)	160*160/320*480
Refresh Rate(Hz)	3840
Brightness(cd/m ²)	700
Average Power (W/m ²)	≤1700
Ingress Protection IP65	IP20

Excellent performance:
Each module can independently stretch out/draw back. The frames present concave-convex, dot-matrix, dynamic waves and other stereo visual effects through precise control

MAIN PRODUCTS

3D Motion Screen - Application Scenarios

Ad. Media

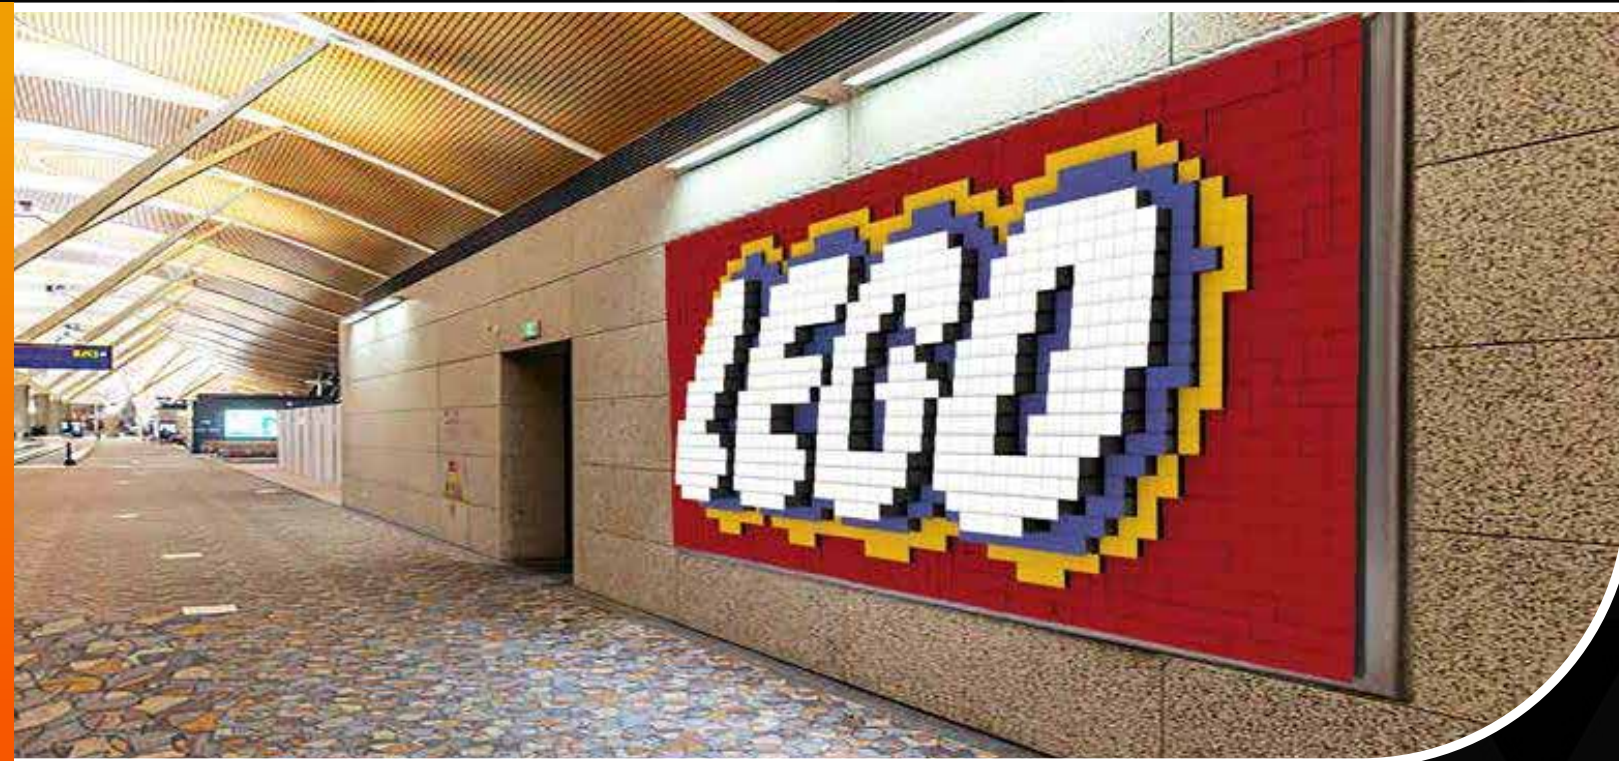

S-tech Exhibition



Airport Lobby



Exhibition



MAIN PRODUCTS

Transparent Screen 1



Items	Parameters
Pixel Pitch(mm)	P3.91
Cabinet Size(mm)	1000*250/1200*250/1500*250
Refresh Rate(Hz)	3840
Brightness(cd/m²)	3000
Average Power (W/m²)	≤450
Ingress Protection	IP20

- Only 2mm thickness & Transparency rate: 90%
- Transparent & invisible, no frame/keel
- Can be bent & cut arbitrarily, curved glass/special shaped screens

MAIN PRODUCTS

Transparent Screen 2 - OLED




Items	Parameters
Screen Size(inch)	30" / 55" / 75"
Brightness(cd/m ²)	450
Transmittance	38%
Average Power (W/m ²)	≤150
Ingress Protection	IP54

- Self-luminous & No external light source
- Ultra-light & ultra-thin design
- Horizontal/vertical splicing mode (2XN/NX2)
- Creative & flexible display (touch&lifting to be customized)

MAIN PRODUCTS


Transparent Screen - Application Scenarios

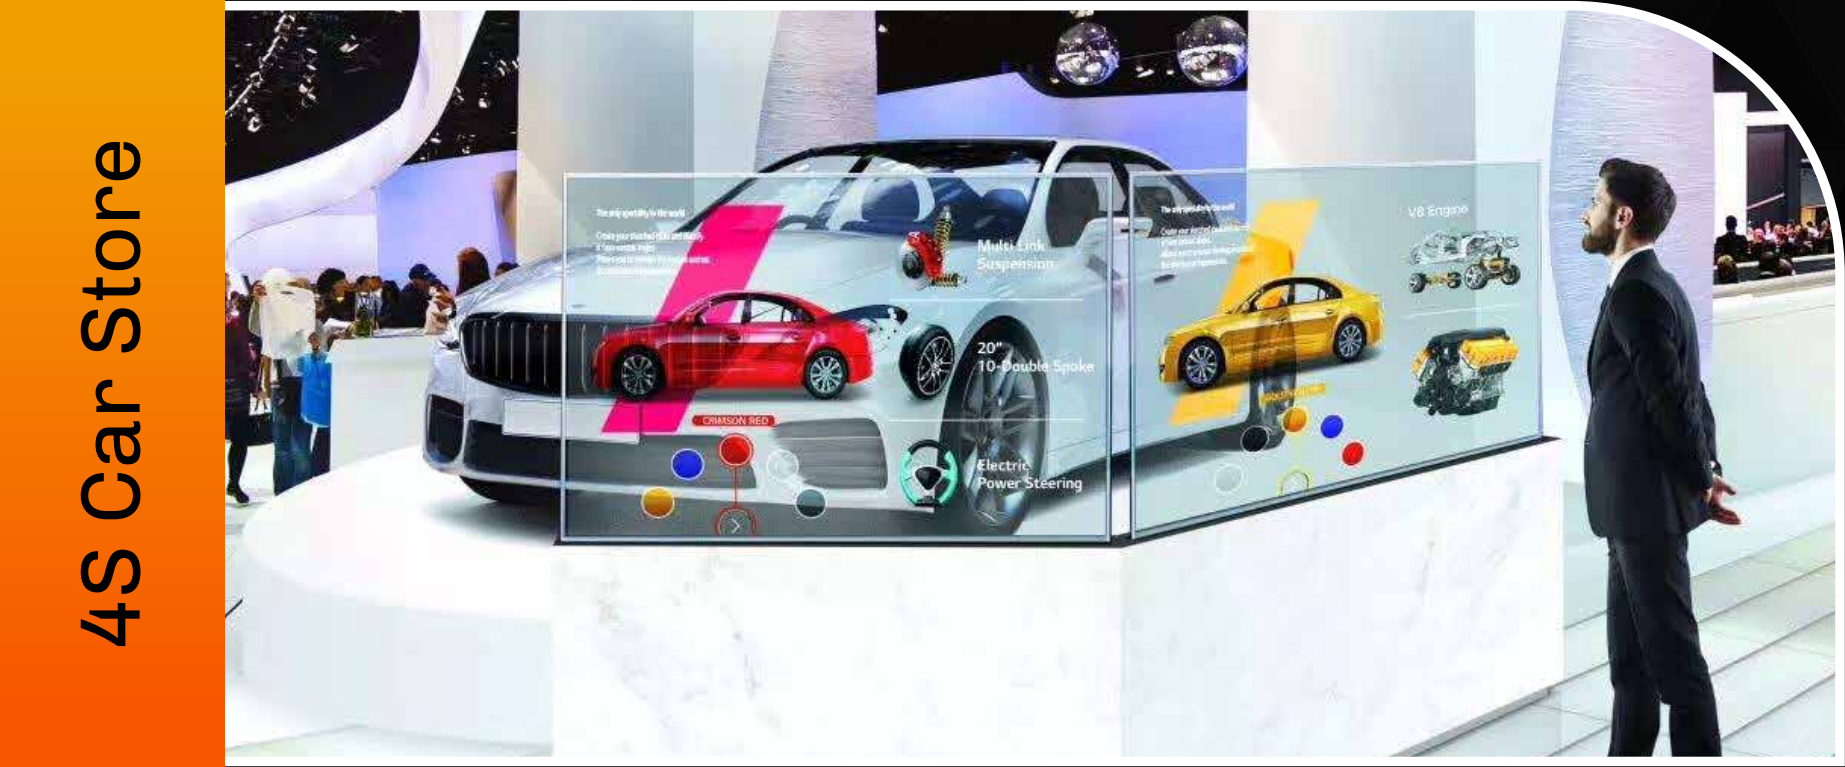

MAIN PRODUCTS

Flexible Screen

sample^x

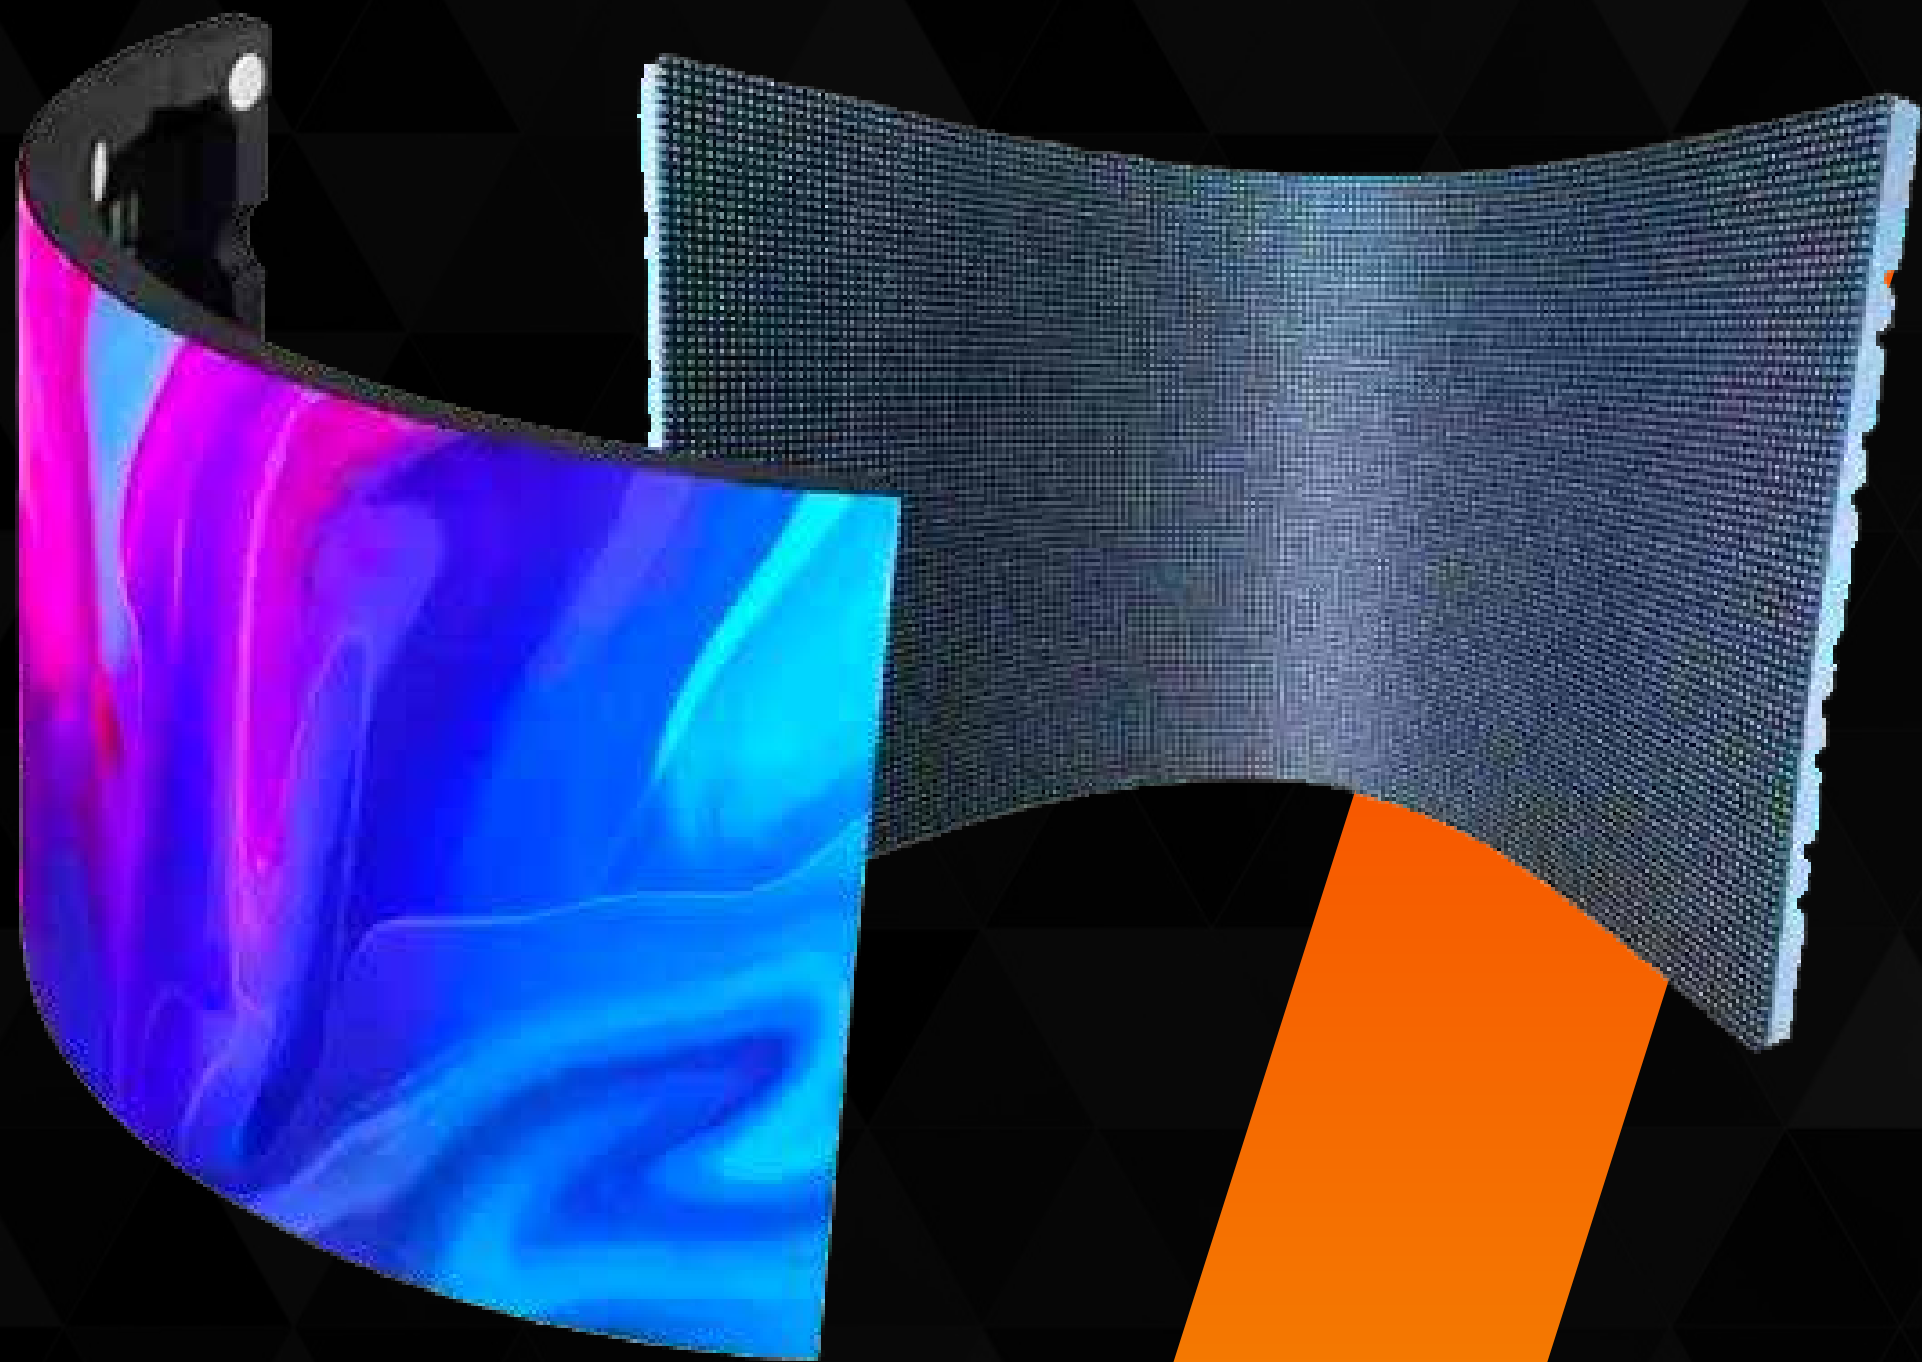

Items	Parameters
Pixel Pitch(mm)	P1.2/1.5/1.8/2/2.5/3
Cabinet Size(mm)	320*160
Refresh Rate(Hz)	3840
Brightness(cd/m ²)	600
Average Power (W/m ²)	≤270
Ingress Protection	IP20

MAIN PRODUCTS

Flexible Screen - Application Scenarios

Show Room




Exhibition



Museum



Creativity Center

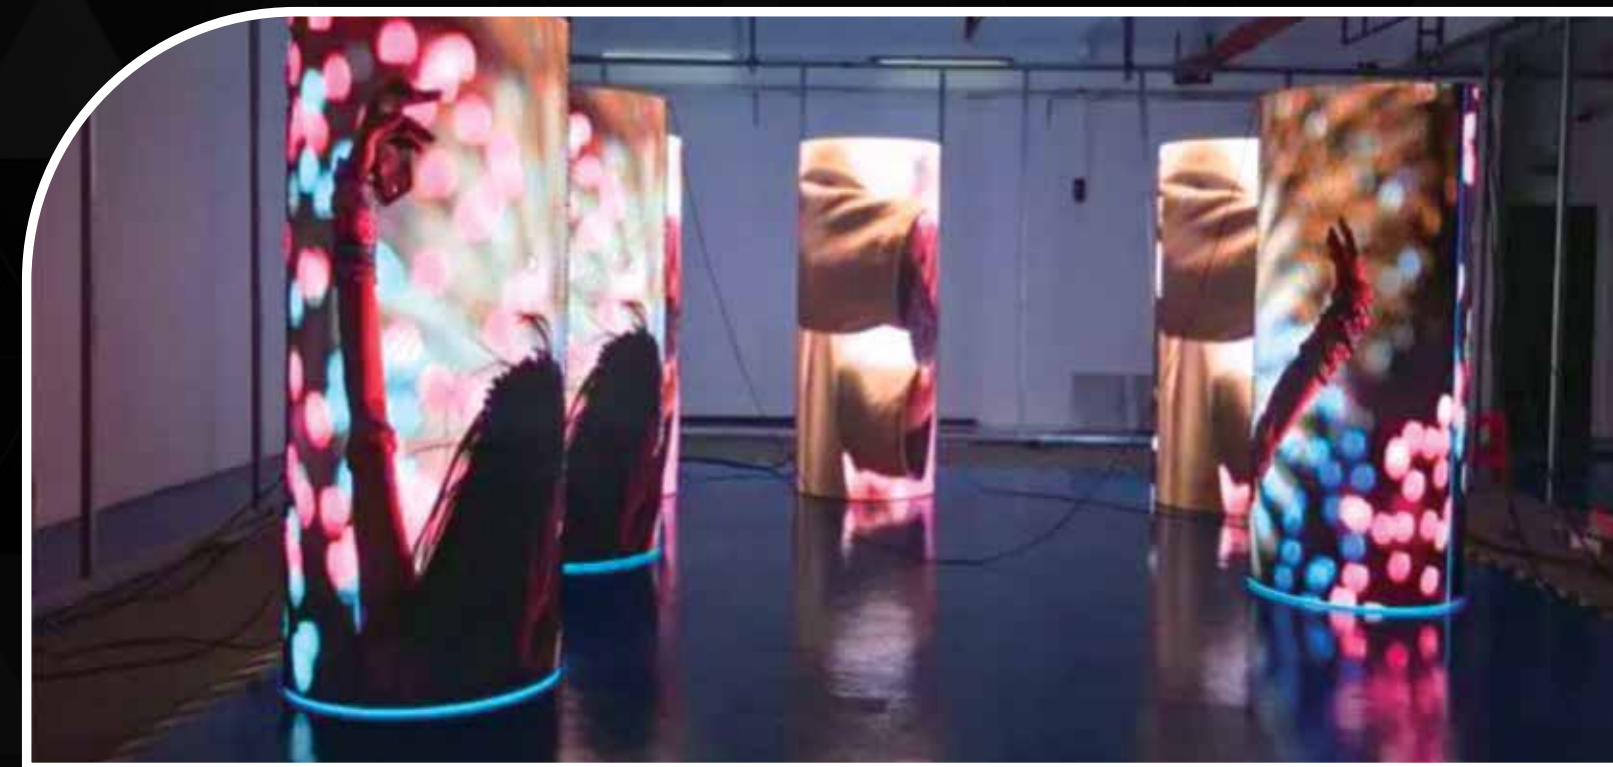

MAIN PRODUCTS

Flip Chip-on Board (COB) for Indoor Applications



Items	Parameters
Pixel Pitch(mm)	P0.93/1.25/1.53/1.86
Cabinet Size(mm)	600*337.5
Refresh Rate(Hz)	3840
Brightness(cd/m ²)	600
Average Power (W/m ²)	≤300
Ingress Protection	IP54

MAIN PRODUCTS

FCOB - Application Scenarios



04 PROJECT CASES

Global Project Cases



Global Project Cases




Global Project Cases



Global Project Cases




Global Project Cases

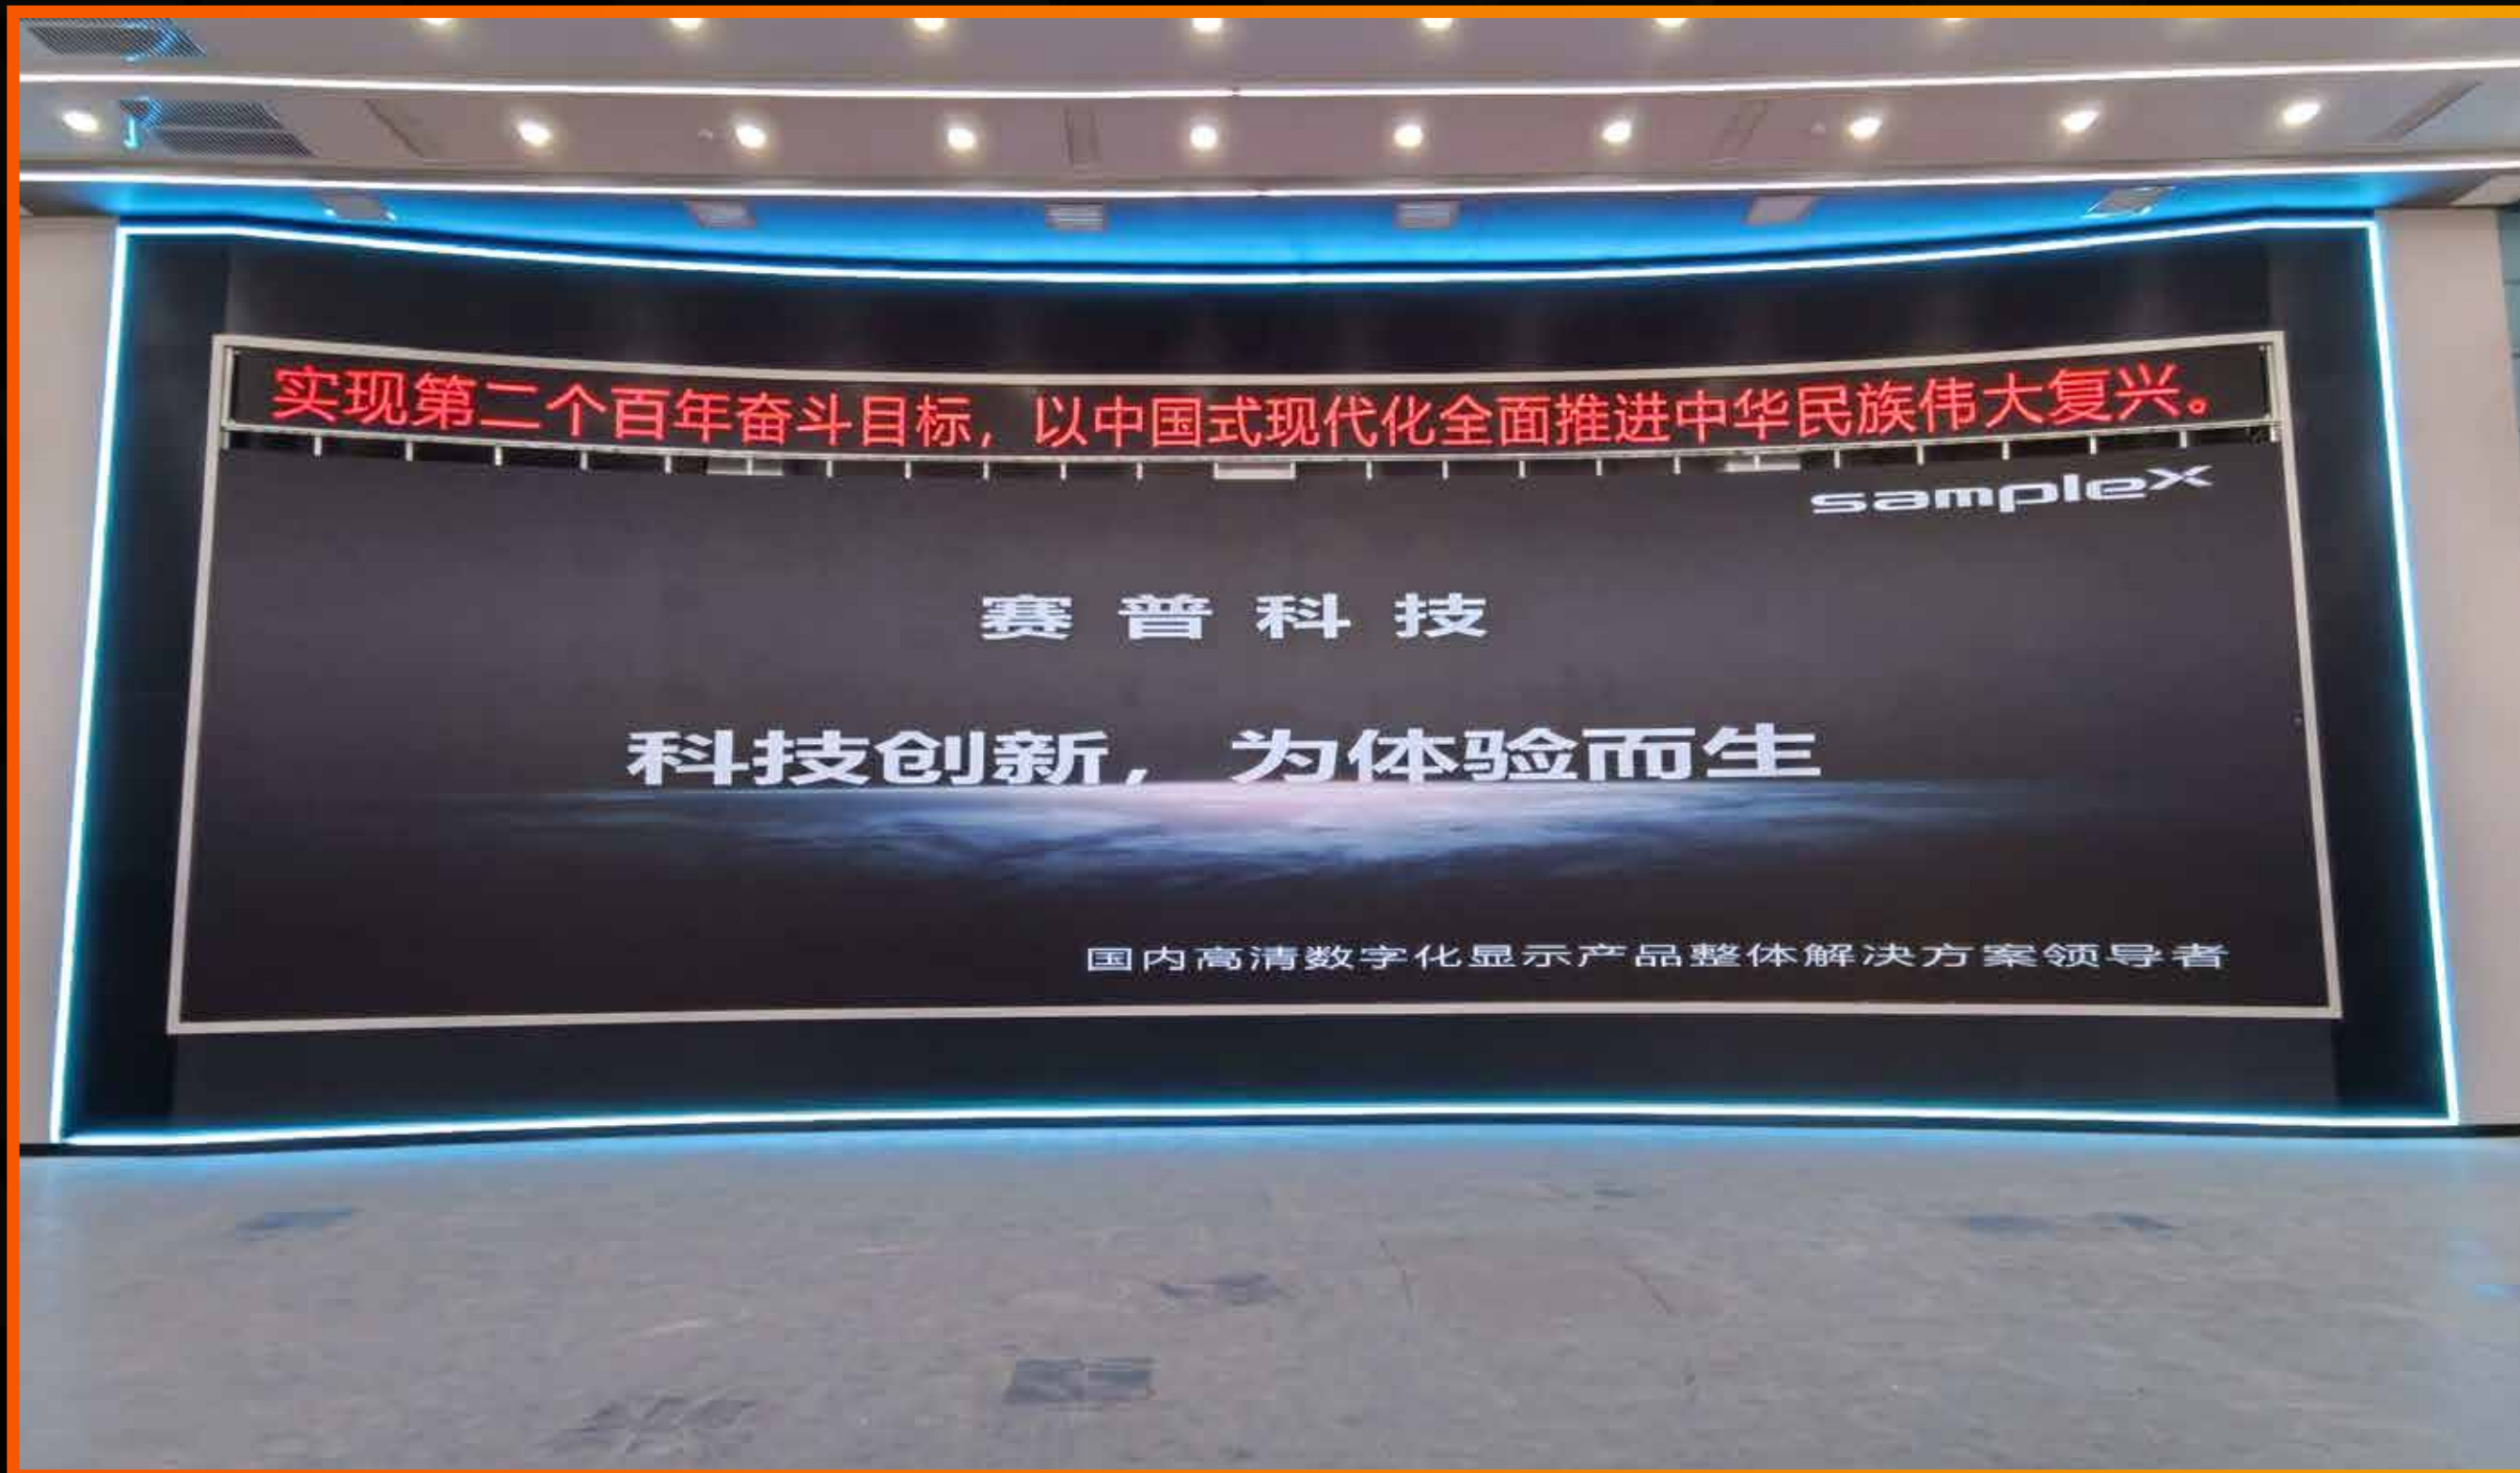


Global Project Cases




Global Project Cases

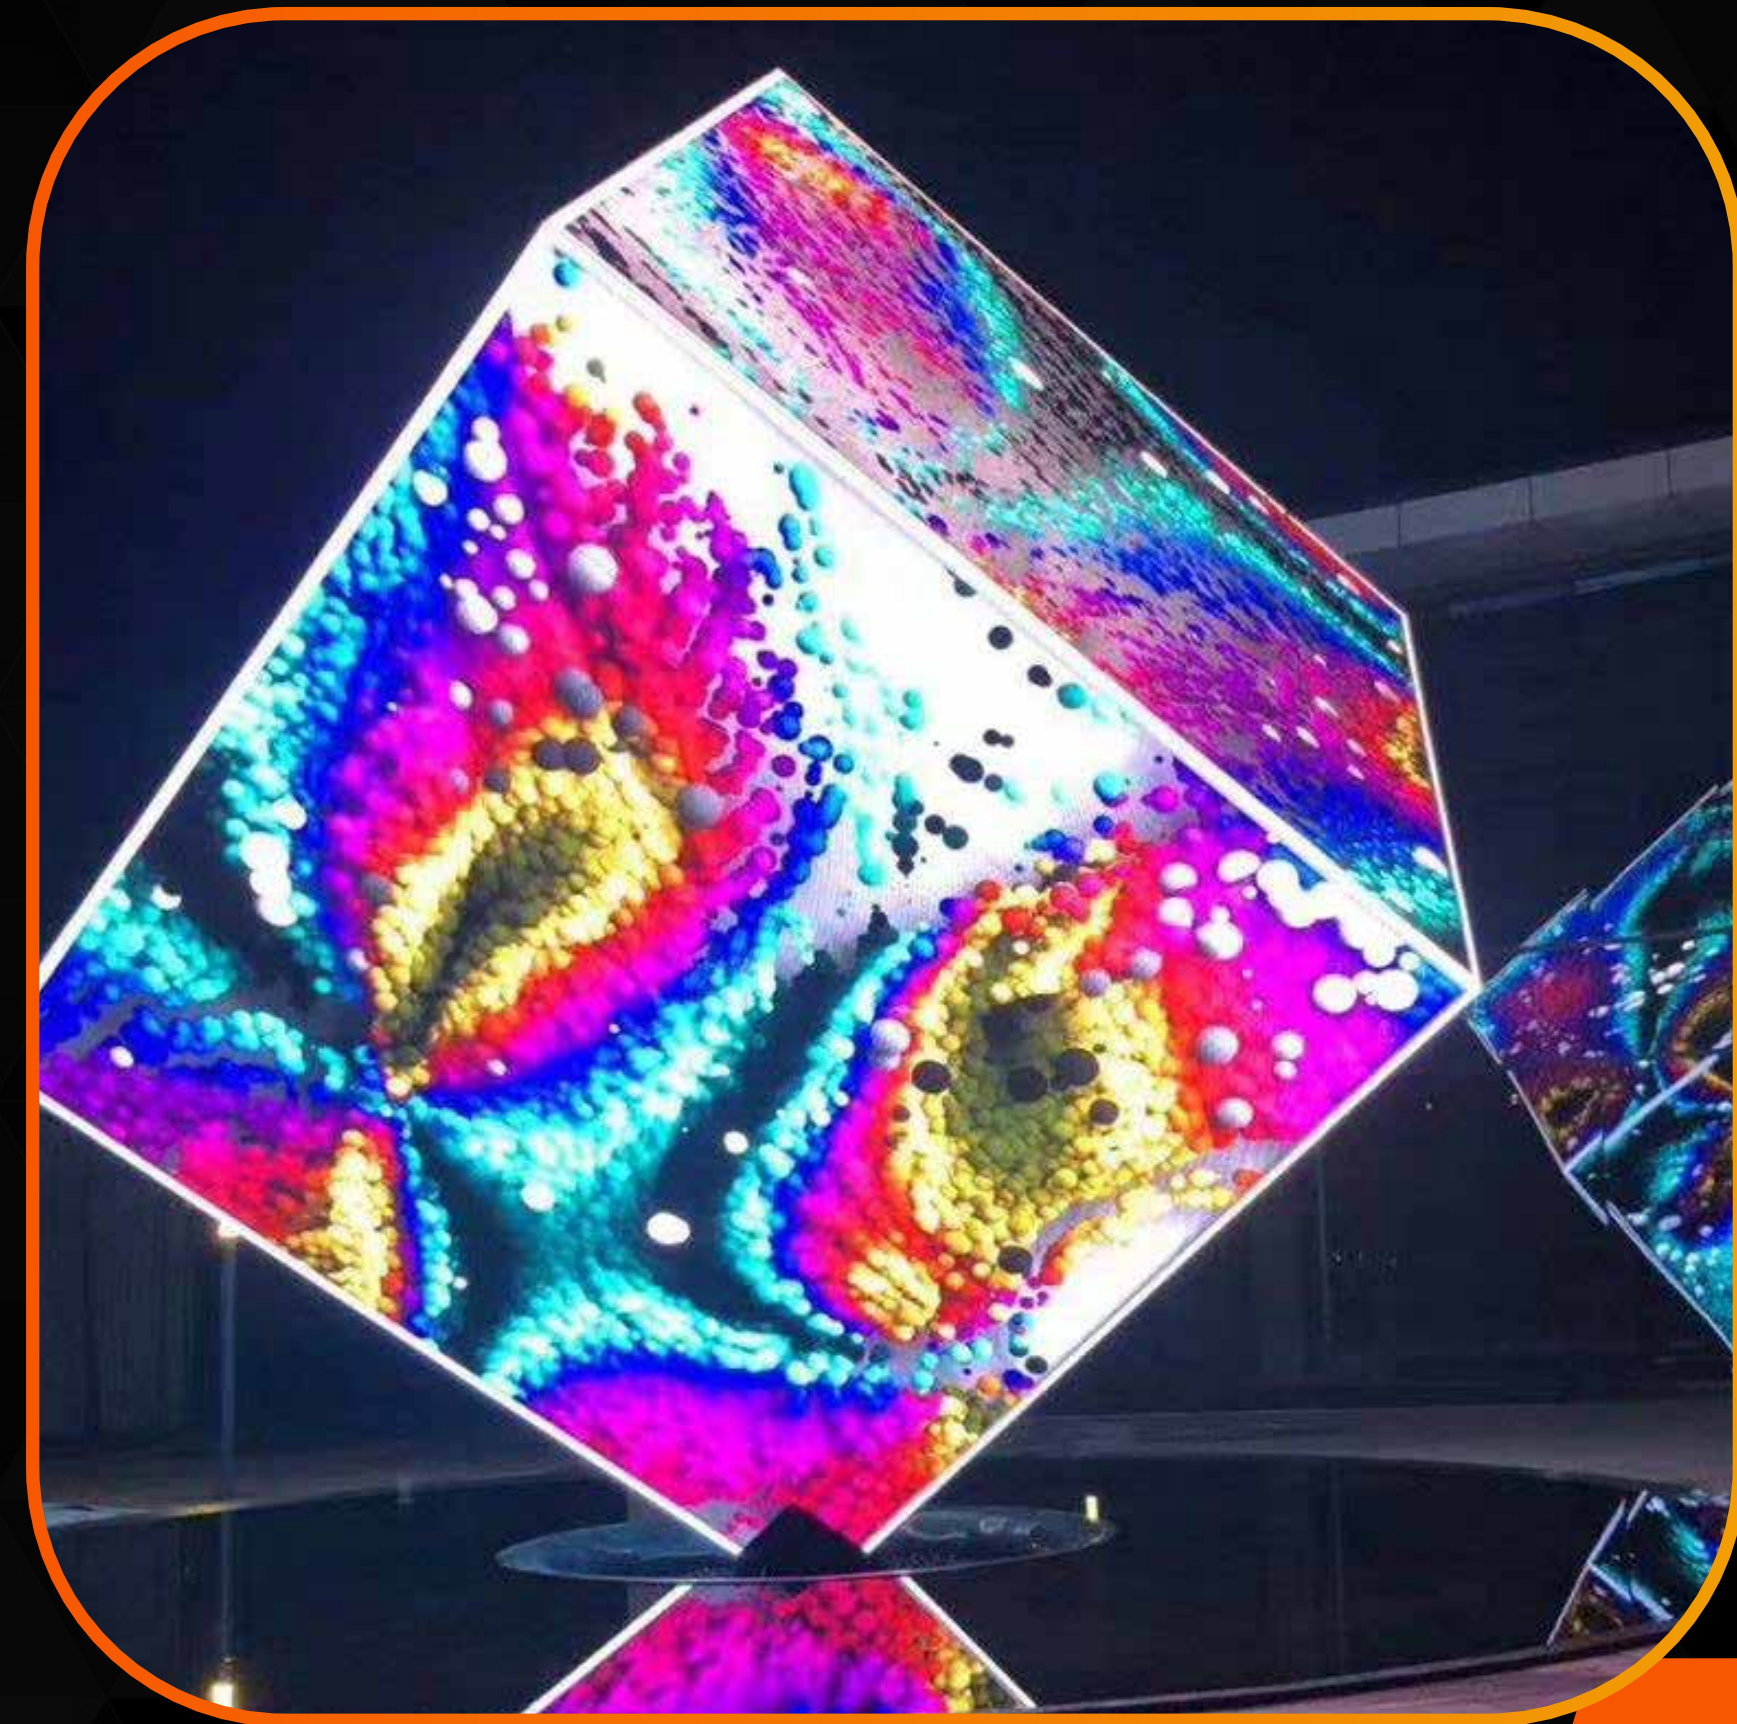

Global Project Cases

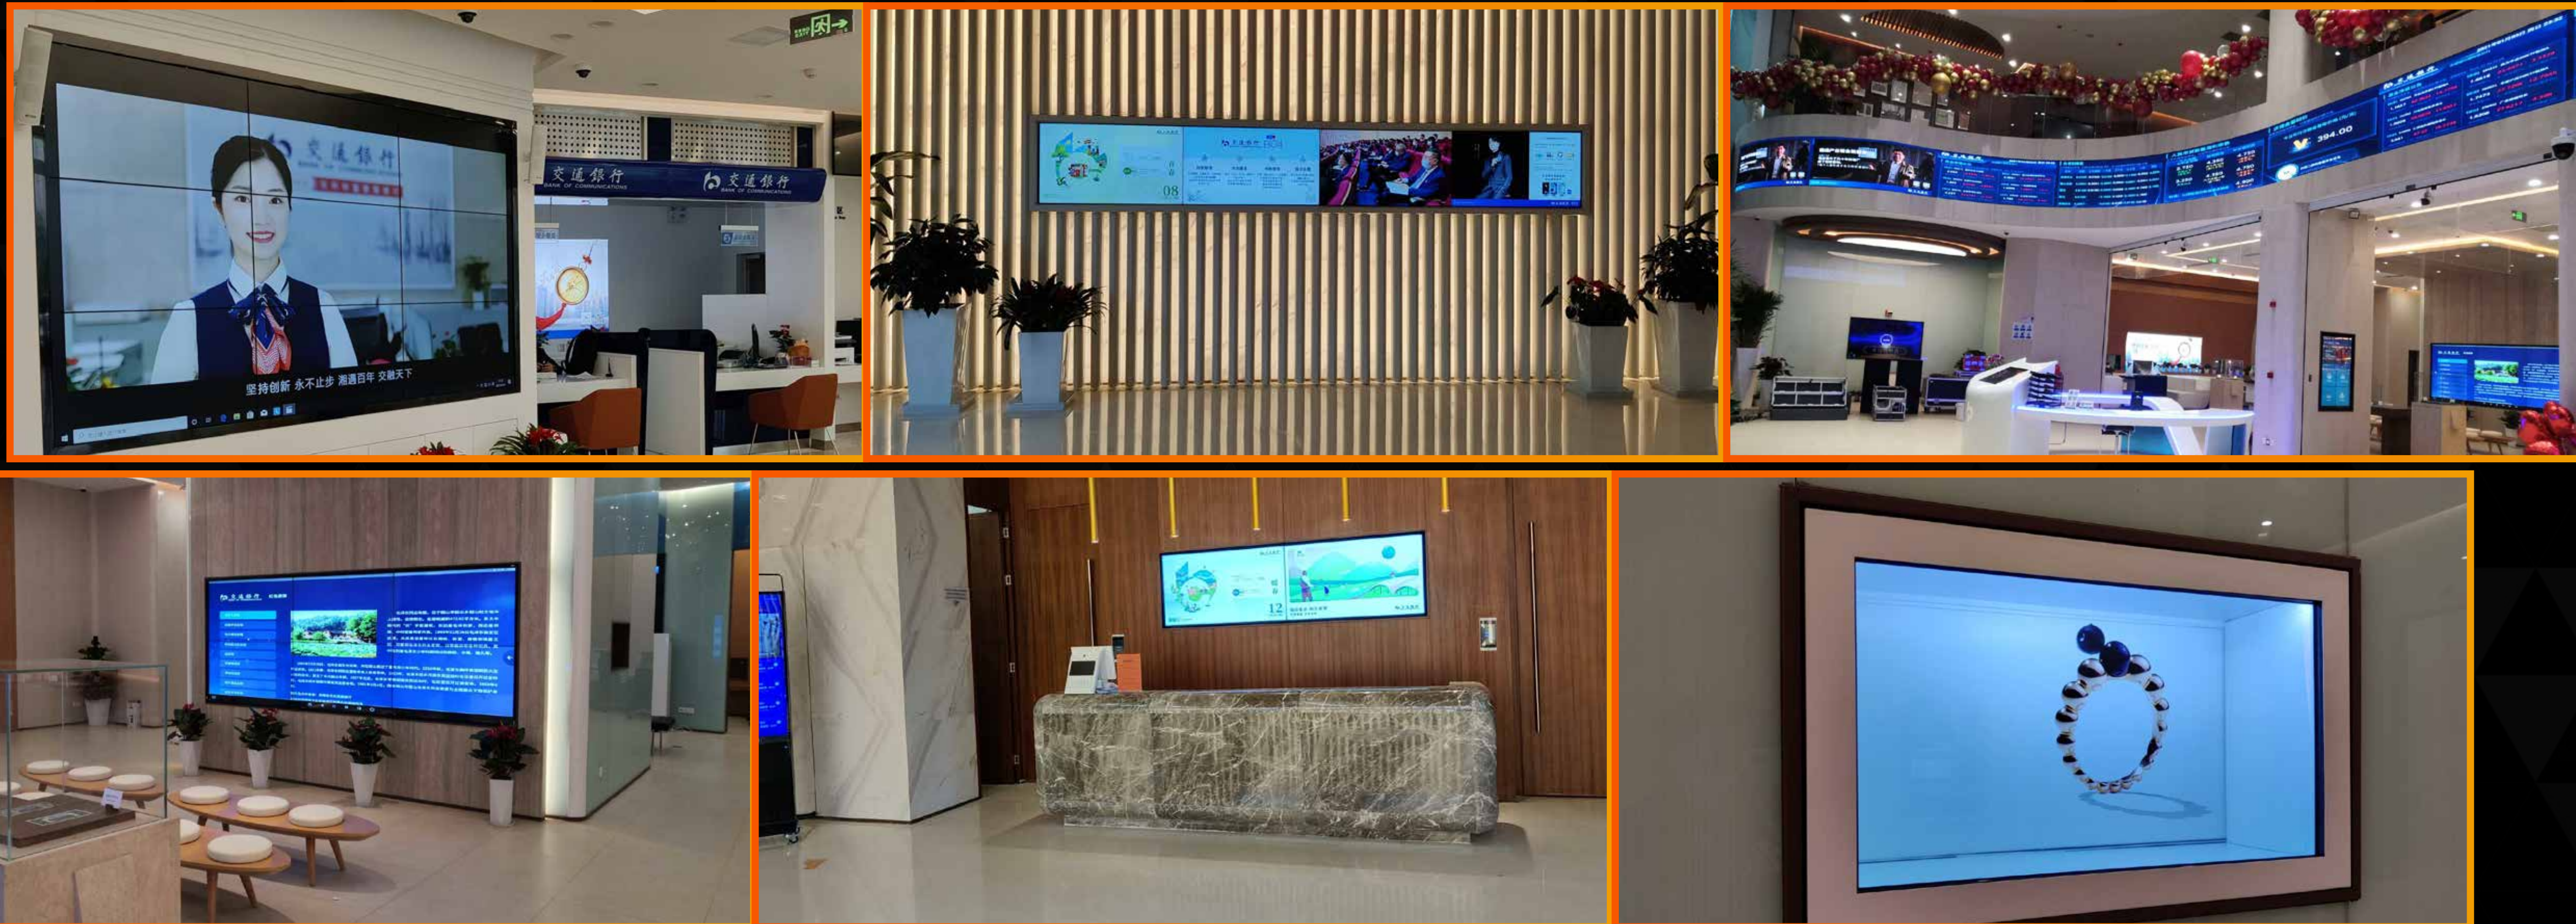

Global Project Cases

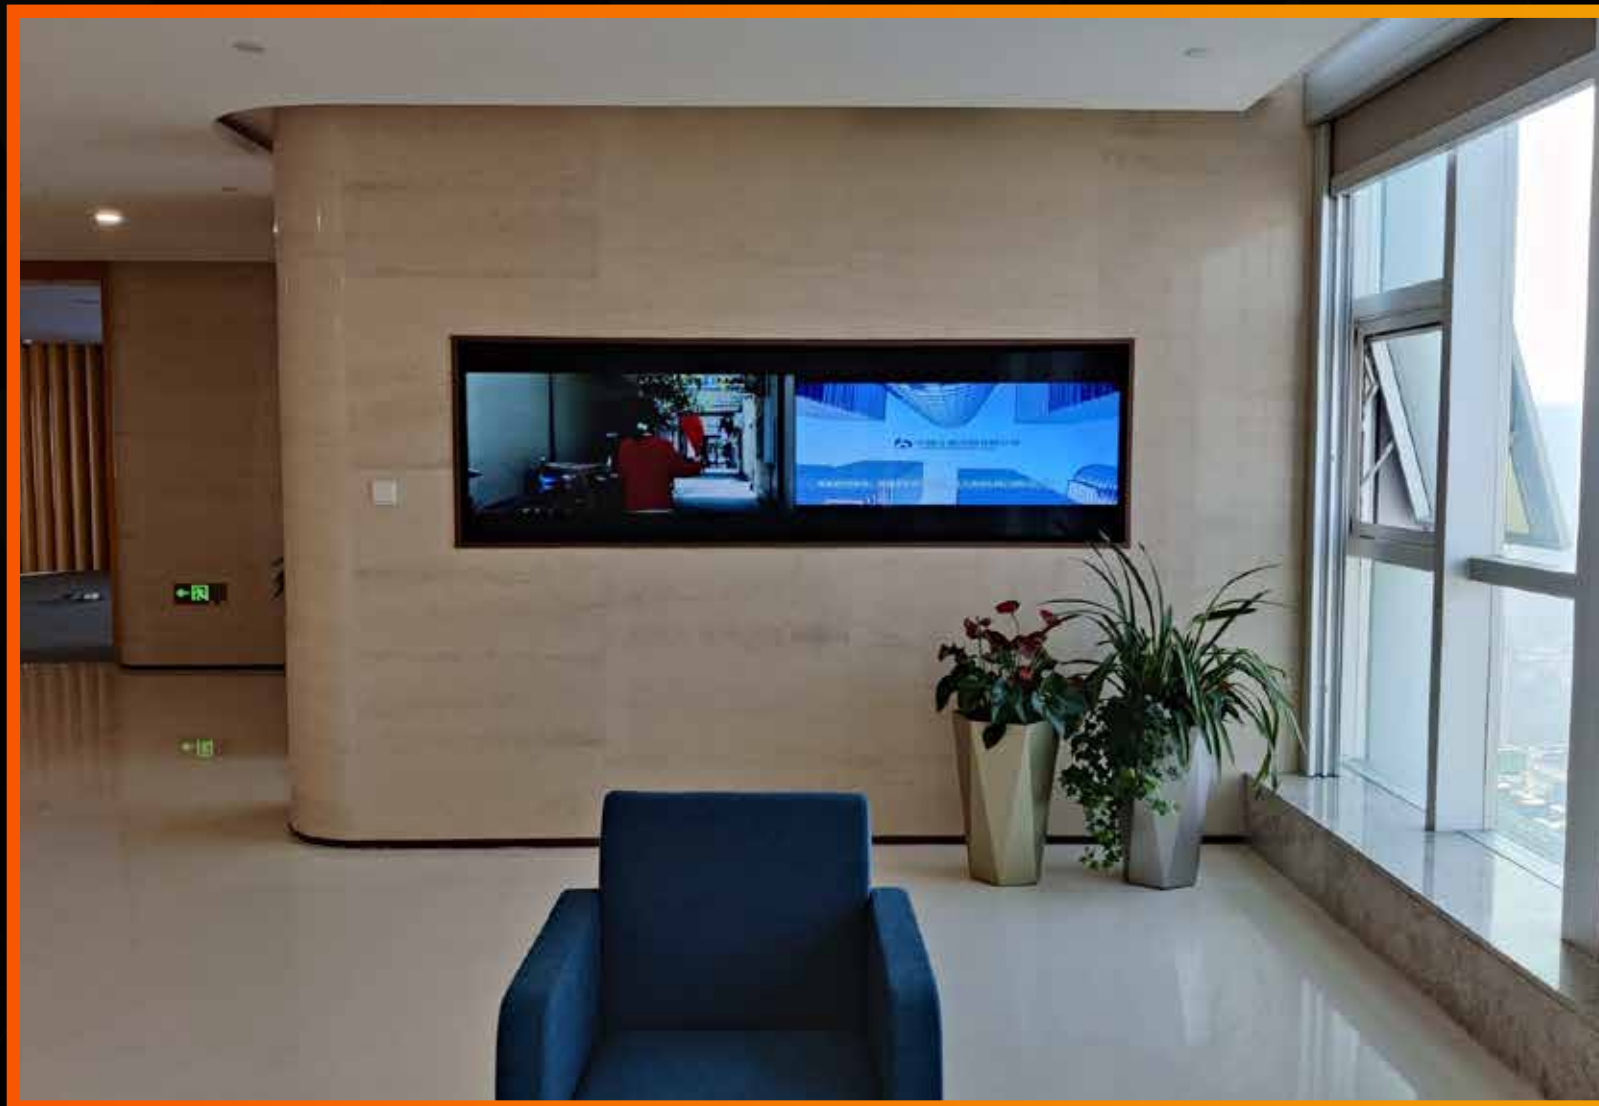

Global Project Cases



Global Project Cases



Global Project Cases



Global Project Cases



Global Project Cases





2024 COMPANY PROFILE



THANK YOU

